


Rec'd PCT/PTO 30 NOV 2004

PCT/GB 2003 / 001959 #2



INVESTOR IN PEOPLE

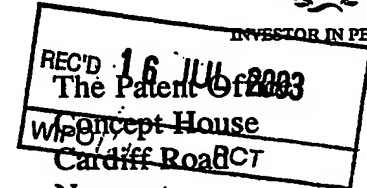

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Stephen Handley*

Dated 19 May 2003


**BEST AVAILABLE COPY**

## Patents Form 1/77

Patents Act 1977  
(Rule 16)31 MAY 02 E72350-1 001091  
P01/7700 0.00-0212636.5

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

PFC 1571 GB

2. Patent application number

(The Patent Office will fill in this part)

0212636.5

3. Full name, address and postcode of the or of each applicant (underline all surnames)

JOHNSON MATTHEY PUBLIC LIMITED COMPANY  
2-4 COCKSPUR STREET  
TRAFALGAR SQUARE  
LONDON SW1 5BQ

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

GB

536268007

4. Title of the invention

ELECTRODE

5. Name of your agent (if you have one)

IAN CARMICHAEL WISHART

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

JOHNSON MATTHEY TECHNOLOGY CENTRE  
BLOUNTS COURT  
SONNING COMMON  
READING RG4 9NH

Patents ADP number (if you know it)

8256331001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d)

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	11
Claim(s)	3
Abstract	1
Drawing(s)	1

10. If you are also filing any of the following, state how many against each item.

Priority documents	
Translations of priority documents	
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	
Request for preliminary examination and search (Patents Form 3/77)	ONE
Request for substantive examination (Patents Form 10/77)	
Any other documents (please specify)	

11.

I/We request the grant of a patent on the basis of this application.

Signature

*I C Wishart*

Date 31.5.02

I C WISHART

12. Name and daytime telephone number of person to contact in the United Kingdom

MRS F B STRANGE 0118 924 2125

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant para(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Check your form for errors before you submit it. Remember to sign and date it.

DUPLICATE

PFC1571

1

ELECTRODE

The present invention relates to a process for the manufacture of an electrode, wherein the electrode is suitable for use as a component of a fuel cell membrane electrode assembly.

Electrochemical cells invariably comprise at their fundamental level a solid or liquid electrolyte and two electrodes, the anode and cathode, at which the desired electrochemical reactions take place. A fuel cell is an energy conversion device that efficiently converts the stored chemical energy of a fuel and an oxidant into electrical energy. The fuel is usually hydrogen, stored as a gas, or methanol stored as a liquid or gas, and the oxidant is air or oxygen. The hydrogen or methanol is oxidised at the anode and the oxygen is reduced at the cathode. In these cells gaseous reactants and/or products have to be diffused into and/or out of the cell electrode structures. The electrodes therefore are specifically designed to be porous to gas diffusion in order to optimise the contact between the reactants and the reaction sites in the electrode to maximise the reaction rate. The electrolyte which has to be in contact with both electrodes to maintain electrical contact in the fuel cell may be acidic or alkaline, liquid or solid, in nature. In the proton exchange membrane fuel cell (PEMFC), whether hydrogen or methanol fuelled, the electrolyte is a solid proton conducting polymer membrane, commonly based on perfluorosulphonic acid materials. The PEMFC is the most likely type of fuel cell to find wide application as a more efficient and lower emission power generation technology in a range of markets including stationary and portable power devices and as alternative to the internal combustion engine in transportation.

25

In the PEMFC the combined laminate structure formed from the membrane and the two electrodes is known as a membrane electrode assembly (MEA). The MEA will typically comprise several layers, but can in general be considered, at its basic level, to have five layers, which are defined principally by their function. On either side of the membrane an anode and cathode electrocatalyst is incorporated to increase the rates of the desired electrode reactions. In contact with the electrocatalyst containing layers, on the opposite face to that in contact with the membrane, are the anode and cathode gas

FFC1571

2

diffusion substrate substrates (GDS). The anode GDS is designed to be porous and to allow the reactant hydrogen or methanol to enter from the face of the substrate exposed to the reactant fuel supply, and then to diffuse through the thickness of the substrate to the layer which contains the electrocatalyst, usually platinum metal based, to maximise the electrochemical oxidation of hydrogen or methanol. The cathode GDS is also designed to be porous and to allow oxygen or air to enter the substrate and diffuse through to the electrocatalyst layer reaction sites.

The complete MEA can be constructed by several methods. The electrocatalyst layers can be bonded to one surface of the GDS to form what is known as a gas diffusion electrode (GDE). The MEA is then formed by bonding two GDEs with the solid proton-conducting membrane. Alternatively, the MEA may be formed from two porous GDSs and a solid proton-conducting polymer membrane catalysed on both sides (hereinafter referred to as a catalyst coated membrane or CCM); or indeed the MEA may be formed from one GDE and one GDS and a solid proton-conducting polymer catalysed on the side facing the GDS.

The electrocatalyst materials for the anode and cathode structures typically comprise precious metals, in particular platinum, as these have been found to be the most efficient and stable electrocatalysts for all low-temperature fuel cells such as the PEMFC. Platinum is employed either on its own as the only electrocatalyst metal or in combination with other precious metals or base metals. The platinum based electrocatalyst is provided as very small particles (~20-50Å) of high surface area, which are often distributed on and supported by larger macroscopic conducting carbon particles to provide a desired catalyst loading. Conducting carbons are the preferred materials to support the catalyst. Particulate carbon black materials typically employed include Vulcan XC72R and Shawinigan. It is also possible that the platinum based electrocatalyst may not incorporate a support, and in this case it is referred to as an unsupported Pt electrocatalyst.

The electrocatalyst layers suitably comprise some level of the proton conducting polymer in contact with the electrocatalyst reaction sites. This enables the efficient

PFC1571

3

transport of protons from the anode reaction sites through the polymer membrane to the cathode reaction sites.

One method of incorporating proton conducting polymer into an electrocatalyst layer is a method wherein a catalyst layer is applied to a GDS, and a solution of proton conducting polymer is subsequently applied to the catalyst layer. The electrocatalyst is formulated into a catalyst ink by dispersing in water and adding a suitable binder. The catalyst ink is applied to the GDS by a suitable process such as screen printing or spraying. Thereafter a solution of proton conducting polymer is applied to the electrocatalyst layer. Such processes are described in EP 577 291.

By incorporating proton conducting polymer in the catalyst layer, it is possible to improve catalyst utilisation wherein the proportion of the platinum-based catalyst that actually takes part in the catalytic reaction is increased. The catalyst utilisation is affected by the three-phase interface between the catalyst, the gaseous reactants, and the proton-conducting polymer. Improving the catalyst utilisation can increase the MEA performance (measured as cell voltage at a given current density) without increasing the amount of platinum-based catalyst.

The problem of improving catalyst utilisation is addressed in EP 637 851. A colloidal dispersion of proton conducting polymer is mixed with a supported catalyst and applied to a GDS to produce a catalyst layer. The colloidal dispersion contains an organic solvent with a polar group other than hydroxyl, eg an ester, ether, carbonyl, amino or carboxyl group.

25

The present inventors have sought to find alternative methods of producing catalyst layers with high catalyst utilisation.

Accordingly, the present invention provides a process for the manufacture of a gas diffusion electrode comprising the steps of


- a) application of a catalyst ink to a gas diffusion substrate;
- b) firing;

PFC1571

4

- c) application of a proton-conducting polymer solution; and  
d) drying;

characterised in that the proton-conducting polymer solution comprises one or more solvents selected from the group of solvents with structure A



5

wherein  $\text{R}^1$ ,  $\text{R}^2$  and  $\text{R}^3$  are independently chosen from H, methyl, ethyl, n-propyl and isopropyl.

Suitably, the proton-conducting polymer solution comprises one or more solvents  
10 selected from N,N-dimethylacetamide, N,N-diethylacetamide, formamide, N-methylformamide, N,N-dimethylformamide, N-ethylacetamide, N,N-dipropylacetamide and N-methyl, N-ethylacetamide.

Preferably, the proton-conducting polymer solution comprises N,N-  
15 dimethylacetamide ( $\text{R}^1$ ,  $\text{R}^2$  and  $\text{R}^3$  are methyl).

The catalyst ink suitably comprises an electrocatalyst, a solvent, optionally one or more binders and optionally one or more rheology modifiers. In one embodiment of the invention, the electrocatalyst is an unsupported metal catalyst such as platinum black. In  
20 a second embodiment of the invention, the electrocatalyst is a supported metal catalyst, such as platinum or a platinum alloy supported on a conductive carbon support. The metal catalyst is dispersed in a solvent, preferably water. Suitable binders include hydrophobic polymers such as polytetrafluoroethylene (PTFE) or fluorinated ethylene-propylene (FEP). Rheology modifiers are suitably cellulose-based, such as  
25 methylcellulose.

The catalyst ink may be applied to a GDS using any technique known to those skilled in the art. Suitable techniques include screen printing, spraying, K-bar techniques and doctor blade methods.

PFC1571

5

The GDS is made of porous electrically conductive sheet material. Suitable materials include carbon fibre papers, for example those available from Toray Industries, Japan, (Toray TGP-H-60 or TGP-H-90), and woven carbon fibre cloths, for example 5 those available from Zoltek Corporation, USA, (Zoltek PWB-3). Substrates such as these are usually modified with a particulate material either embedded within the fibre network or coated on to the large planar surfaces, or a combination of both. Typically these particulate materials comprise a carbon black and polymer mix. The particulate carbon black material is, for example, an oil furnace black such as Vulcan XC72R (from Cabot 10 Chemicals, USA) or an acetylene black such as Shawinigan (from Chevron Chemicals, USA). The polymer most frequently used is polytetrafluoroethylene (PTFE). The coating, or embedding, is carried out in order to improve the water management properties, improve gas diffusion characteristics, to provide a continuous surface on which to apply the catalyst layer and to improve the electrical conductivity. An 15 alternative material that has shown comparable performance to carbon paper or cloth is a substrate comprising a non-woven network of carbon fibres (carbon fibre structures such as Optimat 203, from Technical Fibre Products, UK) with a particulate material embedded within the fibre network. Such materials are disclosed in EP 0 791 974, WO 00/47816, WO 00/55933 and EP 1 063 716.

20

The firing step (b) is suitably carried out in air and must be carried out at a temperature that is sufficient to burn off any rheology modifiers that have been incorporated into the catalyst ink. The temperature must also be sufficient to cause any polymer binders such as PTFE to flow. A suitable firing temperature for a catalyst layer 25 comprising PTFE is in the range 300-400°C.

The proton-conducting polymers suitable for use in the present invention may include, but are not limited to:

1) Polymers which have structures with a substantially fluorinated carbon chain 30 optionally having attached to it side chains that are substantially fluorinated. These polymers contain sulphonic acid groups or derivatives of sulphonic acid groups, carboxylic acid groups or derivatives of carboxylic acid groups, phosphonic acid groups



PFC1571

6

or derivatives of phosphonic acid groups and/or mixtures of these groups. Perfluorinated polymers include Nafion®, Flemion® and Aciplex® commercially available from E. I. DuPont de Nemours (U.S. Patents 3,282,875; 4,329,435; 4,330,654; 4,358,545; 4,417,969; 4,610,762; 4,433,082 and 5,094,995), Asahi Glass KK and Asahi Chemical Industry respectively. Other polymers include those covered in U.S. Patent 5,595,676 (Imperial Chemical Industries plc) and U.S. Patent 4,940,525 (Dow Chemical Co.).

2) Perfluorinated or partially fluorinated polymers containing aromatic rings such as those described in WO 95/08581, WO 95/08581 and WO 97/25369 (Ballard Power Systems) which have been functionalised with  $\text{SO}_3\text{H}$ ,  $\text{PO}_2\text{H}_2$ ,  $\text{PO}_3\text{H}_2$ ,  $\text{CH}_2\text{PO}_3\text{H}_2$ ,  $\text{COOH}$ ,  $\text{OSO}_3\text{H}$ ,  $\text{OPO}_2\text{H}_2$ ,  $\text{OPO}_3\text{H}_2$ . Also included are radiation or chemically grafted perfluorinated polymers, in which a perfluorinated carbon chain, for example, PTFE, fluorinated ethylene-propylene (FEP), tetrafluoroethylene-ethylene (ETFE) copolymers, tetrafluoroethylene-perfluoroalkoxy (PFA) copolymers, poly(vinyl fluoride) (PVF) and poly(vinylidene fluoride) (PVDF) is activated by radiation or chemical initiation in the presence of a monomer, such as styrene, which can be functionalised to contain an ion exchange group.

3) Fluorinated polymers such as those disclosed in EP 0 331 321 and EP 0 345 964 (Imperial Chemical Industries plc) containing a polymeric chain with pendant saturated cyclic groups and at least one ion exchange group which is linked to the polymeric chain through the cyclic group.

4) Aromatic polymers such as those disclosed in EP 0 574 791 and US Patent 5,438,082 (Hoechst AG) for example sulphonated polyaryletherketone. Also aromatic polymers such as polyether sulphones which can be chemically grafted with a polymer with ion exchange functionality such as those disclosed in WO 94/16002 (Allied Signal Inc.).

5) Nonfluorinated polymers include those disclosed in U.S. Patent 5,468,574 (Dais Corporation) for example hydrocarbons such as styrene-(ethylene-butylene)-styrene, styrene-(ethylene-propylene)-styrene and acrylonitrile-butadiene-styrene co- and terpolymers where the styrene components are functionalised with sulphonate and/or phosphonic groups.

PFC1571

7

6) Nitrogen containing polymers including those disclosed in U.S. Patent 5,599,639 (Hoechst Celanese Corporation), for example, polybenzimidazole alkyl sulphonic acid and polybenzimidazole alkyl or aryl phosphonate.

5 The proton-conducting polymer solution comprising one or more of the solvents of structure A may be produced by a solvent exchange technique. Proton-conducting polymers may be purchased as solutions in a mixture of alcohols and water, eg EW1100 5% Nafion® solution available from DuPont. The solvent exchange technique can be used if the solvents of structure A have higher boiling points than the solvents in the as-  
10 purchased solution. The solvents of structure A, eg N,N-dimethylacetamide, are added to the as-purchased solution, and the lower boiling point solvents are evaporated. This may be carried out using a rotary evaporator or a fractionating column.

The proton-conducting polymer solution comprising one or more of the solvents  
15 of structure A may also be produced by dissolving a polymer in the appropriate solvent, preferably in an autoclave.

The proton-conducting polymer solution may be applied to the fired catalyst layer by techniques such as screen printing, spraying, K-bar methods or doctor blade  
20 techniques. A preferred technique is screen printing.

After the proton-conducting polymer solution has been applied, the catalyst layer is dried to remove solvent from the catalyst layer. This can be carried out in an oven with or without a vacuum. A suitable drying temperature is in the range of 100-130°C.

25

The present invention further provides a novel process for the manufacture of an MBA comprising the steps of

- a) application of a catalyst ink to a gas diffusion substrate to form a gas diffusion electrode;
- 30 b) firing the gas diffusion electrode;
- c) application of a proton-conducting polymer solution to the gas diffusion electrode;


PFC1571

8

d) optionally drying the gas diffusion electrode; and

e) combining the gas diffusion electrode with a proton conducting polymer membrane;

characterised in that the proton-conducting polymer solution comprises one or more solvents selected from the group of solvents with structure A



wherein  $\text{R}^1$ ,  $\text{R}^2$  and  $\text{R}^3$  are independently chosen from H, methyl, ethyl, n-propyl and isopropyl.

10 Suitably, the proton-conducting polymer solution comprises one or more solvents selected from N,N-dimethylacetamide, N,N-diethylacetamide, formamide, N-methylformamide, N,N-dimethylformamide, N-ethylacetamide, N,N-dipropylacetamide and N-methyl, N-ethylacetamide.

15 Preferably, the proton-conducting polymer solution comprises N,N-dimethylacetamide ( $\text{R}^1$ ,  $\text{R}^2$  and  $\text{R}^3$  are methyl).

Preferably, two GDEs are combined with the proton conducting polymer membrane. To combine the electrodes and the membrane, it is preferred to use a laminating process wherein the components are combined by the application of pressure, and optionally heat. Suitable MEA laminating processes are described in EP 577 291. The drying step (d) is optional because in one embodiment of the invention, the membrane and the GDE can be combined whilst the GDE is still wet, ie solvent is still present in the catalyst layer. If the lamination step is carried out using a wet GDE, it may be necessary to dry the MEA after lamination, in order to remove any residual solvent.

The proton conducting polymer membrane preferably contains a polymer such as those described above.

PFC1571

9

The electrodes and MEAs manufactured according to the processes of the invention are suitable for use in fuel cells, but may also find use in other applications such as gas sensors or electrolytic reactors. The electrodes and MEAs comprising unsupported catalysts may be particularly useful when used in Direct Methanol Fuel Cells.

5

The invention will now be described by way of example only.

### Comparative Example 1

10 Electrode preparation: Two carbon fibre paper substrates (Toray TGP-H-60) were treated with PTFE, and carbon black base layers were applied to one surface of each substrate. Platinum black catalyst layers were printed onto the base layers at a loading of  $4.19\text{mg}/\text{cm}^2$ . A top-coat of ion-conducting polymer solution was brushed onto each catalyst layer. The polymer solution was an aqueous solution of Nafion®, produced as  
15 described in EP 731 520 and essentially containing water and 10wt% Nafion® polymer. The polymer coatings were dried at  $105^\circ\text{C}$  in air to remove the water, giving a polymer loading of  $0.23\text{mg}/\text{cm}^2$ .

MEA preparation: The two electrodes were combined with a Nafion 112  
20 membrane (DuPont) in a standard MEA lamination process, as commonly practised in the art.

### Comparative Example 2

25 Electrodes and an MEA were prepared as in example 1 except the loading of the Nafion® polymer was  $0.7\text{mg}/\text{cm}^2$ .

### Example 1

30 Electrode preparation: A first electrode was prepared as described in comparative example 1. A second electrode was prepared in a similar manner except that the ion-conducting polymer solution was a 10wt% solution of Nafion® polymer in N,N-

PFC1571

10

dimethylacetamide. The solution was produced by a solvent exchange process using as-received EW1100 Nafion® solution from DuPont. The solution was brushed onto the platinum black catalyst layer and dried at 105°C in air, giving a polymer loading of 0.32mg/cm<sup>2</sup>. A second coat of the solution was brushed onto the electrode, but the second layer was not dried. This gave a wet electrode with a nominal polymer loading of 0.6mg/cm<sup>2</sup>.

MEA preparation: The first and second electrodes were combined with a Nafion 112 membrane (DuPont) as in comparative example 1. The second electrode was wet (ie N,N-dimethylacetamide solvent remained in the catalyst layer) when the MEA was bonded. After the lamination step, the MEA was dried at 105°C to remove any remaining solvent.

#### MEA Performance

The MEAs produced in comparative examples 1 and 2 and example 1 were tested in a fuel cell at 80°C. Hydrogen at 200kPa gauge and 100% relative humidity was supplied to the anode, and air or oxygen at 200kPa gauge and 100% relative humidity was supplied to the cathode. The reactant stoichiometry was 1.5:2 for hydrogen to air and 1.5:10 for hydrogen to oxygen (giving the same volumetric gas flow rate in both cases).

20

Figure 1 shows the cell voltage versus the current density for the three MEAs. There are two data sets for example 1. In a first experiment, the second electrode (made using the N,N-dimethylacetamide solution) was placed on the cathode side of the fuel cell. The data from this experiment is simply labelled "Example 1: Air/Oxygen". In a second experiment, the second electrode was placed on the anode side of the fuel cell. The data from this experiment is labelled "Example 1 reversed: Air/Oxygen". Under the conditions in the performance test (with a pure hydrogen feed) it is the cathode that limits the performance of an MEA. If the catalyst utilisation in the cathode is improved, there will be a marked improvement in the MEA performance, particularly at low current densities.

30

PFC1571

11


Figure 1 shows that the performance of comparative example 1 and "example 1 reversed" are comparable. There is no performance benefit gained by placing the electrode made using the N,N-dimethylacetamide solution at the anode side of the fuel cell. Comparative example 2 has a higher Nafion® loading than comparative example 1, but shows similar performance at low current densities and therefore the catalyst utilisation is not significantly altered by the increased polymer loading. Example 1 exhibits the best performance at low current densities. Placing the electrode made using the N,N-dimethylacetamide solution at the cathode side of the fuel cell produces a performance gain, demonstrating that the use of the N,N-dimethylacetamide solution improves the catalyst utilisation in the catalyst layer.

PFC1571

12

**Claims**

1. A process for the manufacture of a gas diffusion electrode comprising the steps of
- a) application of a catalyst ink to a gas diffusion substrate;
  - b) firing;
  - c) application of a proton-conducting polymer solution; and
  - d) drying;
- characterised in that the proton-conducting polymer solution comprises one or more solvents selected from the group of solvents with structure A



10


wherein  $\text{R}^1$ ,  $\text{R}^2$  and  $\text{R}^3$  are independently chosen from H, methyl, ethyl, n-propyl and iso-propyl.

2. A process according to claim 1, wherein the proton-conducting polymer solution comprises N,N-dimethylacetamide.
3. A process according to claim 1 or claim 2, wherein the catalyst ink comprises an electrocatalyst, a solvent, optionally one or more binders and optionally one or more rheology modifiers.
4. A process according to claim 3, wherein the electrocatalyst is an unsupported metal catalyst.
5. A process according to claim 3, wherein the electrocatalyst is a supported metal catalyst.
6. A process according to any preceding claim, wherein the catalyst ink comprises a PTFE binder.

PFC1571

13

7. A process according to any preceding claim, wherein the proton-conducting polymer solution comprises a perfluorinated polymer.
8. A process for the manufacture of a membrane electrode assembly comprising the steps of
- a) application of a catalyst ink to a gas diffusion substrate to form a gas diffusion electrode;
  - b) firing the gas diffusion electrode;
  - c) application of a proton-conducting polymer solution to the gas diffusion electrode;
  - d) optionally drying the gas diffusion electrode; and
  - e) combining the gas diffusion electrode with a proton conducting polymer membrane;
- characterised in that the proton-conducting polymer solution contains one or more solvents selected from the group of solvents with structure A



wherein  $\text{R}^1$ ,  $\text{R}^2$  and  $\text{R}^3$  are independently chosen from H, methyl, ethyl, n-propyl and iso-propyl.

9. A process according to claim 8 wherein, the proton-conducting polymer solution comprises N,N-dimethylacetamide.
10. A process according to claim 8 or claim 9, wherein the catalyst ink comprises an electrocatalyst, a solvent, optionally one or more binders and optionally one or more rheology modifiers.
11. A process according to claim 10, wherein the electrocatalyst is an unsupported metal catalyst.



FFC1571

14

12. A process according to claim 10, wherein the electrocatalyst is a supported metal catalyst.
13. A process according to any one of claims 8 to 12, wherein the catalyst ink comprises a PTFE binder.
14. A process according to any one of claims 8 to 13, wherein the proton-conducting polymer solution comprises a perfluorinated polymer.

10

PFC1571


15

## Abstract of the Invention

A novel process for the manufacture of a gas diffusion electrode comprising the steps of

- a) application of a catalyst ink to a gas diffusion substrate;
- b) firing;
- 10 c) application of a proton-conducting polymer solution; and
- d) drying;

characterised in that the proton-conducting polymer solution comprises one or more solvents selected from the group of solvents with structure A




15 wherein  $\text{R}^1$ ,  $\text{R}^2$  and  $\text{R}^3$  are independently chosen from H, methyl, ethyl, n-propyl and isopropyl is disclosed. A novel process for the manufacture of a membrane electrode assembly is also disclosed.

20

25

1/1

Figure 1

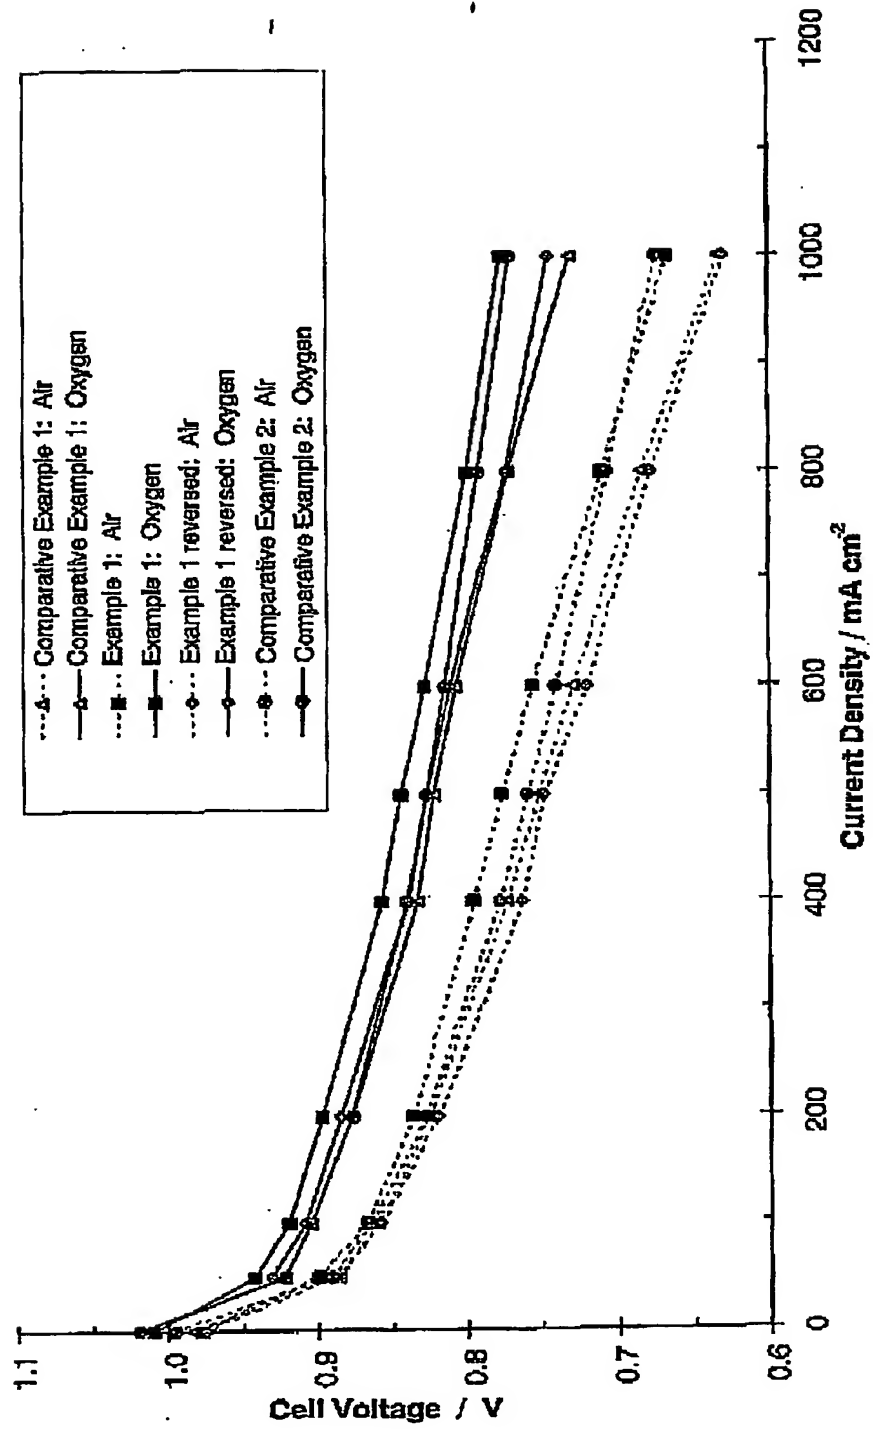

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**